




Super flexible, smoothbore convoluted PTFE hose. When space is an issue but a smoothbore is a must for an uninterrupted flow and ease of cleaning. UltiFlex is the ultimate problem solver. Available with FDA approved Virgin or Anti-static PTFE tubes. PTFE lined 'Flared/Tafted' fittings to improve cleanliness, remove bug traps and improve the ability to clean in place.

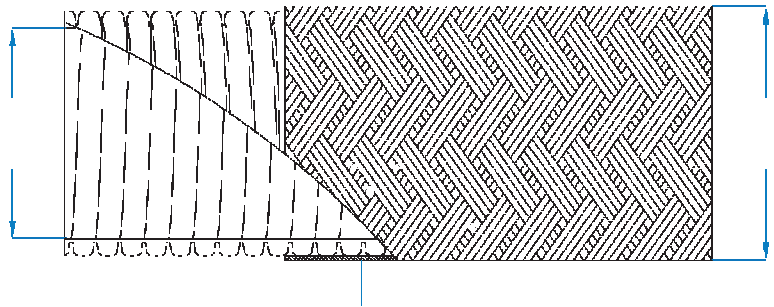

PROPERTIES

APPLICATION	Pharmaceutical, Bio-pharm, Chemical, Food & Beverage + Ultra clean environments.		
DESIGN INNER	Smoothbore Convoluted PTFE tube with Polypropylene Braid.		
LAYER	FDA approved Virgin or Anti-static PTFE tube.		
OUTER LAYER	Polypropylene Braid, black with white stripes electric conductive		
TEMP MIN	-60°C	TEMP MAX	+90°C
MATERIAL	PTFE according to "ASTM D4895, Type 1, Grade 4, Class B"		

Part No Natural	Part No Antistatic	Size	D1 OD Nominal (mm)	D2 Wall Thickness (mm)	D3 ID Nominal (mm)	Minimum Bend Radius (mm)	MWP (Bar)	(Bar) 20°C
UFXGPPB12	UFXASPB12	3/4"	25.00	1.80	19.50	50	10	40
UFXGPPB14	UFXASPB14	7/8"	28.00	2.00	22.00	55	10	40
UFXGPPB16	UFXASPB16	1"	32.50	2.20	26.00	70	10	40
UFXGPPB20	UFXASPB20	1.25"	39.50	2.70	32.80	100	10	40